



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET:

#106-A DOVETAIL CORRUGATED ANCHOR for use with #100-A LARGE DOVETAIL ANCHOR SLOT.


Used for attaching brick veneer to an existing concrete wall that has #100-A Large Dovetail Anchor slots.

Specials: 16 gage minimum to a maximum thickness 3/16" in Plain, Hotdip, and Electro and 1/8" in Stainless Steel.

Width is 2" wide only.

Any Length up to 25" is available. Lengths are measured from the Face of The Concrete.

Available in Plain Steel, Mill Galvanized Steel, Electro Galvanized After Fabrication, Hotdip Galvanized After Fabrication, and Stainless Steel.

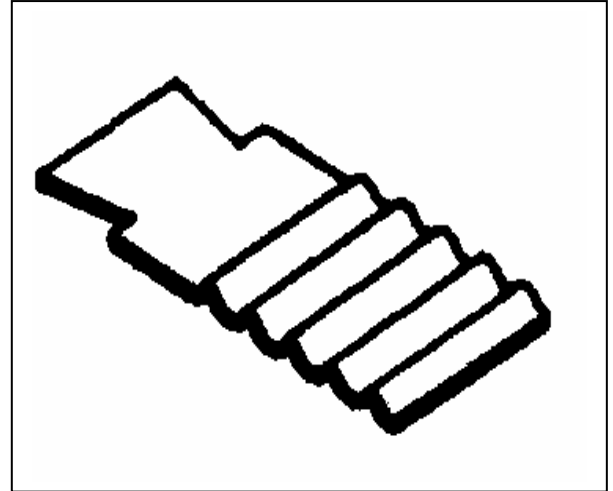

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Firewall Anchors:

Rolled Strip Zinc Alloy 710.

(Firewall allow 1/8" and 16 gage only)

Approvals:

Comments: