



Heckmann Building Products Inc.


1501 N. 31st Avenue
Melrose Park, IL 60160-2911
800-621-4140 or 708-865-2403 Fax: 708-865-2640
www.heckmannbuildingprods.com

SUBMITTAL SHEET: #121 DOVETAIL THREADED ROD ANCHOR

Made to Order.

Threaded rod is welded 1" onto a 12 gage Dovetail Clip that is 1" wide and extends 1" from the face of the dovetail slot. Threaded rods are available in diameters of 1/4", 3/8", 1/2", and 5/8". Specify the required length of the rod. Nut and washer are optional.

This system can be used as a brick veneer anchor, as a bolt to extend through the brick veneer wall so signs can be bolted onto the exterior, or as a Masonry Wall Stabilizing Anchor (Use with #421 Plastic Tube and a 3/8" diameter rod, smooth or threaded)

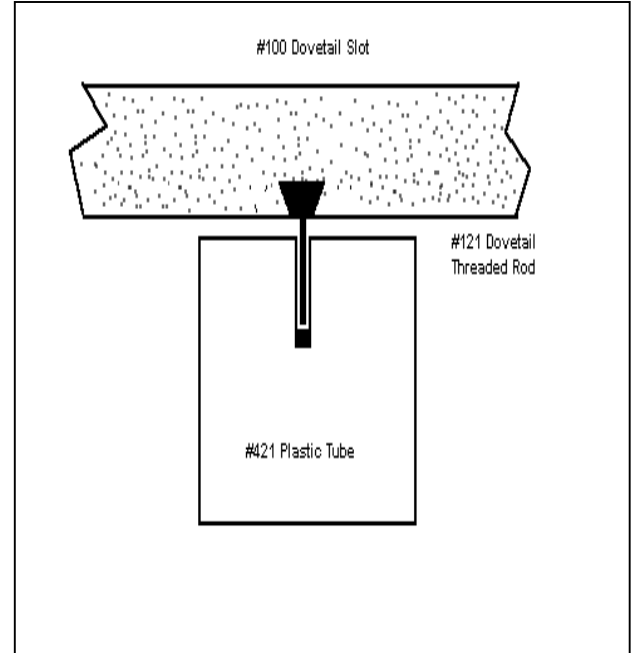

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

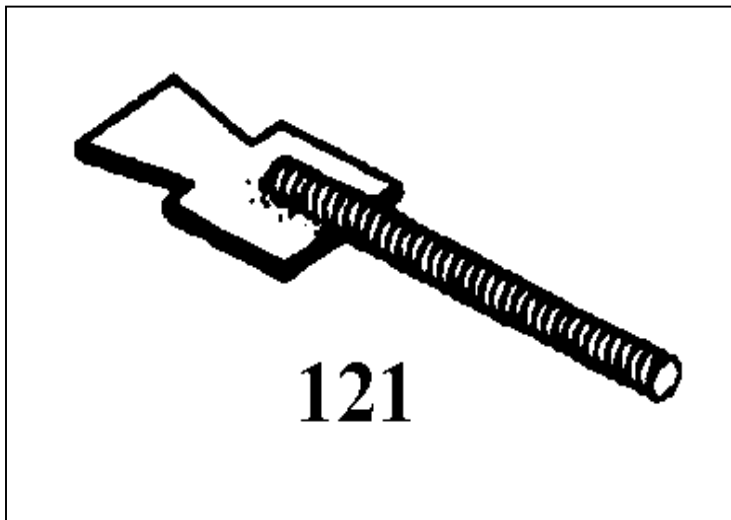

Approvals:

Comments: