



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #154-A DOUBLE HALF-PIN STONE ANCHOR

Made to order:

Thickness of strap: 1/4", 3/16", 1/8", 11 gage, 12 gage, 14 gage, & 16 gage.

Diameter of Pin: 1/4", 3/8", 1/2", & 5/8".

Width: minimum width recommended is 1-1/4". (You should allow at least 1/4" of steel on each side of a pin).

Length: Specify overall length of strap and overall length of pins. (Pins are usually a minimum of 1-1/2" long)

Available in Stainless Steel, Hotdip Galvanized After Fabrication, Electro Galvanized After Fabrication, Mill Galvanized, or Plain Steel.

Specify Location of Pins from center of pins to end of anchor. 1/2" minimum of steel between end of anchor and start of hole is recommended.

Pins are usually welded in place.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.


Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Firewall Anchors:

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

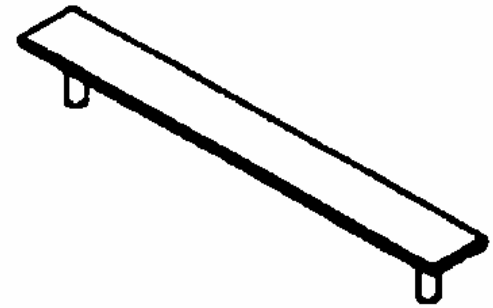

154-A

Approvals:

Comments: