



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #173 THREADED JAY BOLT

Made to Order:

Available diameters of rods are 1/4", 3/8", 1/2", or 5/8". Measure Length as overall length from end to end. Specify the length of the thread and the inside diameter and return length of the J-Hook. (IMPORTANT! To prevent cracking or stress on the steel the inside diameter of the J-Hook should be a minimum of twice the thickness of the material. i.e. 1/4" diameter rods should have a minimum of 1/2" i.d. opening.)

Available in Plain Steel, Mill Galvanized (1/4" diameter only), Electro Galvanized After Fabrication, Hotdip Galvanized After Fabrication, and Stainless Steel.

Can be furnished with or without nut and washer.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft²)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

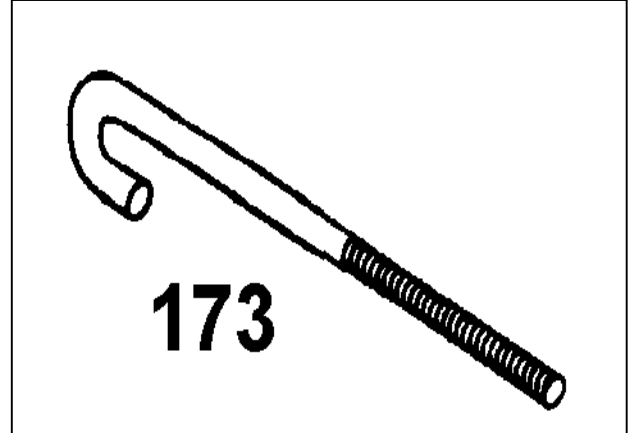

Approvals:

Comments: