



# Heckmann Building Products Inc.

1501 N. 31<sup>st</sup> Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

[www.heckmannbuildingprods.com](http://www.heckmannbuildingprods.com)

## SUBMITTAL SHEET: #187 BRICK VENEER ANCHORS

**Standard Size:** 16 gage x 1-1/4" wide x 3-1/2" or 5-1/2" long + 1-1/2" bend with a 5/16" diameter hole. Mill Galvanized, Hotdip Galvanized After Fabrication, and Stainless Steel.

**Specials:** Maximum thickness is 1/4". Minimum width 3/4". Minimum length 2-1/2".

Minimum Bend Length 3/4" i.d..

Specify diameter and location of hole in the bend (we recommend hole size to be 1/16" larger than the screw size i.e. for a 1/4" screw we punch a 5/16" diameter hole)

Available in Plain Steel, Mill Galvanized Steel, Electro Galvanized After Fabrication, Hotdip Galvanized After Fabrication, or Stainless Steel.

### **Stainless Steel:**

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

### **Hotdip Galvanized:**

ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

### **Mill Galvanized:**

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

### **Plain Steel:**

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.


### **Zinc Alloy 710:**

For Firewall anchors

### **Firewall Anchors:**

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

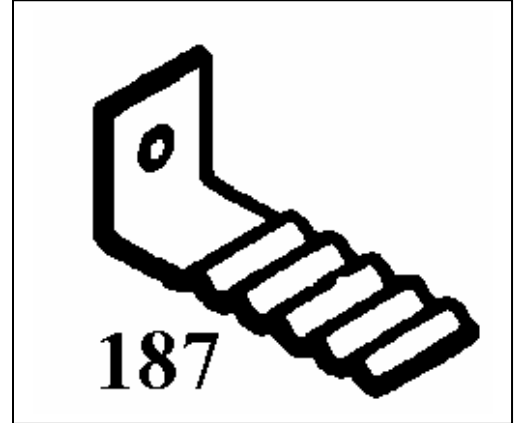

Approvals:

Comments: