



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #197-T TWISTED CORRUGATED COLUMN ANCHOR

Used to tie masonry to a vertical structural steel beam with the column flanges perpendicular to the wall.

Size: 1/8" thick x 1 1/4" wide. Specify overall length of anchor and length from inside of hook to the start of the twist (usually the beam flange dimension). Twist is 1 3/4" long. Specify location and diameter of optional hole for bolting to the beam. Available in Mill Galvanized, Hotdip Galvanized After Fabrication, and Stainless Steel.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.


Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Firewall Anchors:

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

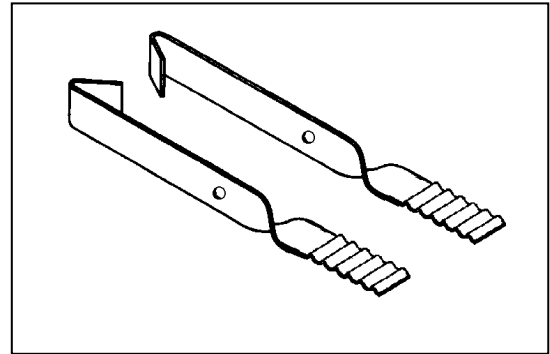

Approvals:

Comments: