



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannanchors.com

SUBMITTAL SHEET: NO. 198 ROD LOCK CORRUGATED BEAM & WALL ANCHOR

For attaching CMU to Steel Beams with Beam Flanges Parallel to Wall.

Made to Order:

Gage: 12ga, 1/8", 3/16" and 1/4"

Width: 1 1/4" (1/4" thick max width 1")

Slot: 7/16" x 1" slot for 3/8" diameter rod.

Bend length: 1"


Distance from bend to start of twist: 2"

Twist is 2" long

Rod: 3/8" diameter x Flange Width + 3"

Specify overall length of anchor from inside of bend to the end. (Corrugation starts 4" from inside of bend)

Material: Hotdip Galvanized After Fabrication, Stainless Steel, or Zinc Alloy 710.

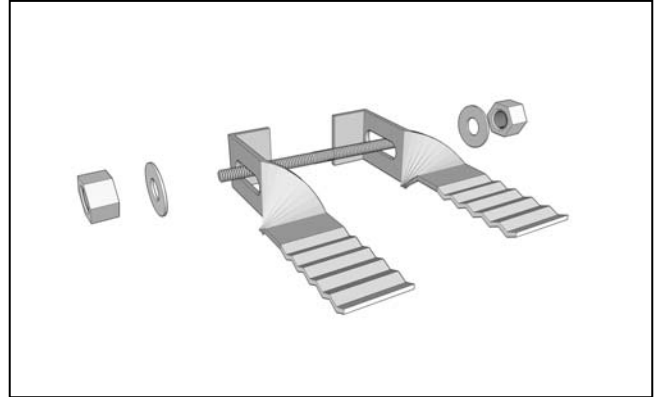

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Firewall Anchors:

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

Approvals:

Comments: