



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #217 WIRE- TYPE COLUMN ANCHOR (Column Flanges Perpendicular to Wall)

STANDARD SIZES: Hook is 1/2" x 2-1/2". 90° Bend into masonry is 2". Lengths from inside of hook to inside of masonry bend are 10", 12", 14", and 16". Available in 1/4" diameter and 3/16" diameter wire. Mill Galvanized Steel or Hotdip Galvanized After Fabrication Steel.

Custom lengths, hook sizes, and masonry bend lengths are available. Stainless Steel, Plain Steel, and Electro Galvanized After Fabrication are also available.

Anchor is used to tie Masonry to structural Steel where the Structural Steel Column Flanges are Perpendicular to the wall. Used in pairs. For compression loads the anchor must be welded to the column flange.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

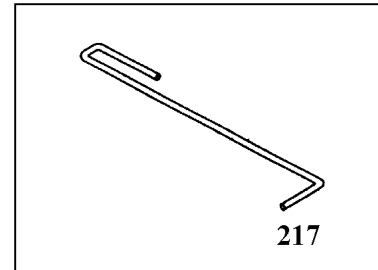

Approvals:

Comments: