



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannanchors.com

SUBMITTAL SHEET: No. 282 DOUBLE PINTLE WIRE TIE

Standard: 3/16" diameter wire ties available in 3", 3 1/2", 4" and 5" lengths. Pintles allow a 1 1/4" vertical adjustment above or below the anchor plane. Available in Mill Galvanized, Hotdip Galvanized After Fabrication, and Stainless Steel.

(Used in conjunction with Pos-I-Tie® Thermal Clip system, No. 213 Wire Veneer Anchor System and No. 259 Corrugated Double Anchor).

Code maximum allowable adjustment distance is 1 1/4" from the plane of the two anchors.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.




Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

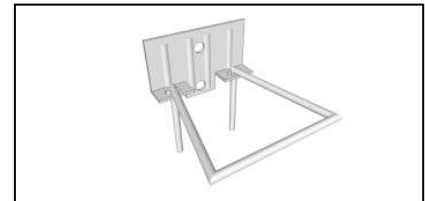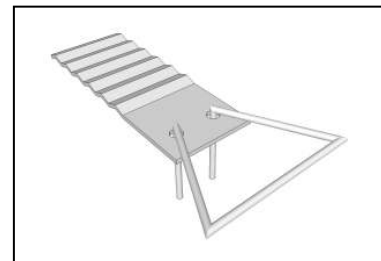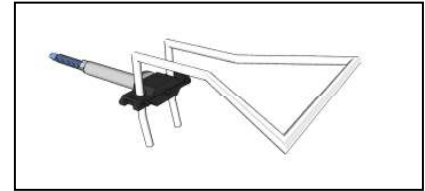

Approvals:

Comments: