



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannanchors.com

SUBMITTAL SHEET:

NO. #312 L-TYPE VENEER

ANCHOR

NO. 258 SINGLE PINTLE TIE

The use of Single Pintle Wire Ties is allowed in the TMS402/ACI50/ASCE5 2011 and 2013 Building Code Requirements and Specification for Masonry Structures.

Standard Sizes:

#312 Anchor

16 gage x 1-1/4" wide with 1" bend and two 7/32" diameter holes. Standard Lengths are 3/4", 1 3/4", and 2 3/4".

#258 Pintle 3/16" diameter with 2" bends in lengths of 3" and 5".

Available in Stainless, Hotdip Galvanized After Fabrication, and Mill Galvanized.

Special Sizes available.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft²)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

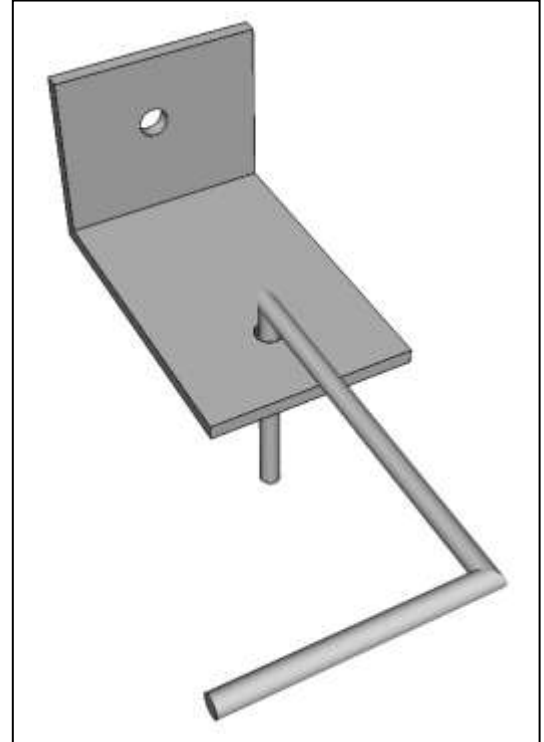

Approvals:

Comments: