



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640



www.heckmannbuildingprods.com

SUBMITTAL SHEET: #421 PLASTIC TUBE

Used with Masonry Wall Stabilizing Rod Anchors attached to a top slab. The rod extends inside the plastic tube, which is filled at the bottom with a compressible filler. Vertical deflection of the slab above is allowed while the compressive loads are not transferred to the masonry wall below.

Standard lengths are 7" long. Tube is clear plastic 1/2" i.d. for use with a 3/8" diameter rod and 5/8" o.d.

Also see wall stabilizing anchors #419, #139-R and #121.

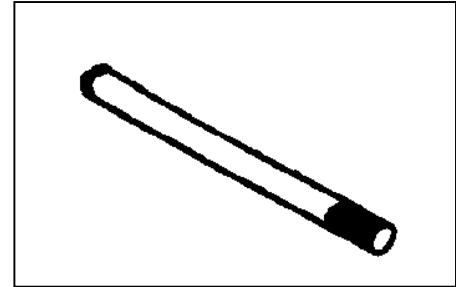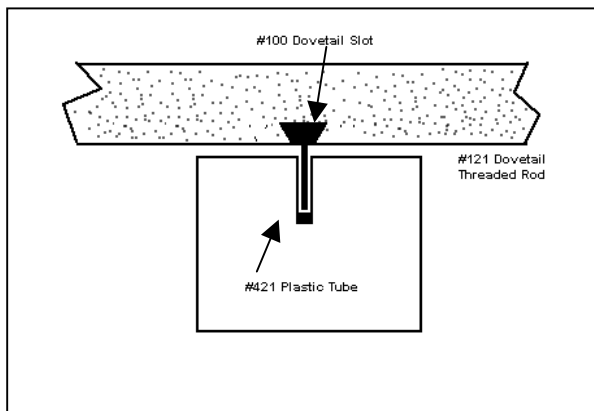

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft²)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Approvals:

Comments: