



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #586 TWISTED JOIST PIN ANCHOR

Used to anchor joist to masonry wall.

Standard Sizes: 1/8" x 1" wide with 7/32" holes for nailing to the side of joist. Fixed Pin is 3/8" diameter x 5" long and is centered 1" from the end of the anchor. Available in Plain and Mill Galvanized in the following lengths:

14" long with two holes

18" long with three holes spaced 3" o.c. starting 3/4" from end.

40" long with three holes spaced 16" o.c. starting 1" from end. This is used for anchoring three joists for to a parallel masonry wall.

Special sizes are available. Specify thickness (1/8" minimum recommended), width (1" minimum recommended), overall length, diameter and length of pin, location of pin in the anchor, and size and location of holes.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.


Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Firewall Anchors:

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

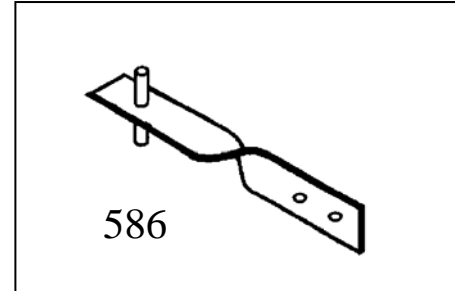

Approvals:

Comments: