



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: No. 82 Rubberized Asphalt Thru-Wall Flashing


- 40-mil thick composite consisting of a 32 mil self-adhering rubberized asphalt membrane laminated to an 8 mil cross-laminated high density polyethylene film.
- Cross Laminated film resists mechanical damage and ensures integrity of rubberized asphalt waterproofing membrane.
- Rubberized asphalt seals around Pos-I-Tie® fasteners preventing water penetration to backup.
- Easy to detail around corners and angle changes.

Installation: Surface must be dry and have a smooth finish.

Concrete, Masonry and some exterior gypsum substrates require priming.

When a splice is required, overlap a minimum of 6". Cut bottom edge back 1/2" from finished surface of building. Press firmly in place with a steel hand roller.

SIZE	PACKAGING
12" x 100 ft	2 rolls per box 32 boxes pallet
18" x 100 ft	1 roll per box 48 boxes pallet
24" x 100 ft	1 roll per box 32 boxes per pallet
36" x 75 ft	1 roll per box 35 boxes per pallet

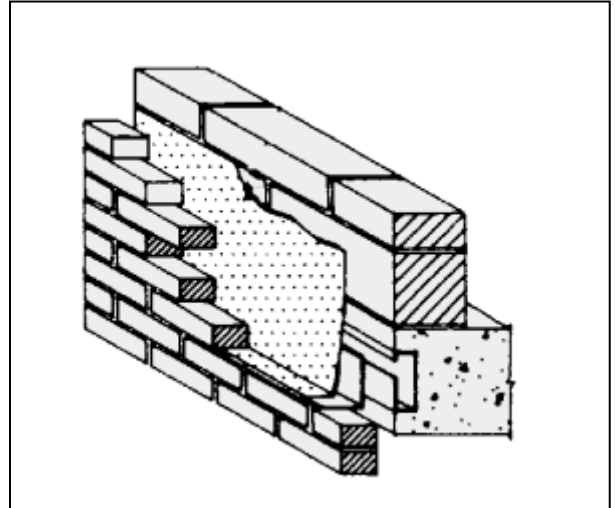

Property	Method	Results
Thickness	-	40 mils
Tensile Strength	ASTM D412	1200 psi min
Elongation	ASTM D412	200%
Pliability	ASTM D146	Passes @ - 25° F 1/4" mandrel
Peel Adhesion	ASTM D903	5lb/in width
Puncture Resistance	ASTM E154	80 lbs (min)

Approvals:

Comments: