



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: TERMINATION BAR (T-BAR)

Standard Size: **Flat Type** - 1/8" x 1-1/4" wide x 8 Feet Long with 5/16" diameter holes every 12" o.c. starting 6" from the end. Stainless Steel, Mill galvanized

Single Lip T-Bar – 16 gage x 1-1/4" wide x 10 ft long type 304 Stainless Steel with 1/2" lip at 45°.

Double Lip T-Bar – 22gage x 1" wide x 10 ft long type 304 Stainless Steel with 1/2" lips at 45°.

Used to secure flashing to an existing wall. Start fastening at one end of the bar and proceed to the next hole to avoid bowing. Apply a sealant to the top edge of the bar and feather.

Custom sizes, widths, and steel types are available. Also available in 16 gage x 1-1/4" wide x 10' long. Holes can be spaced 16" or 24" o.c. (Steel types should match the steel type of your flashing to avoid galvanic reaction)

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60




Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

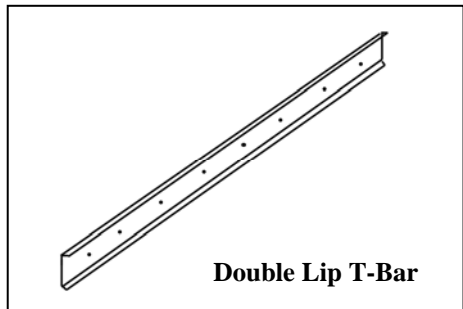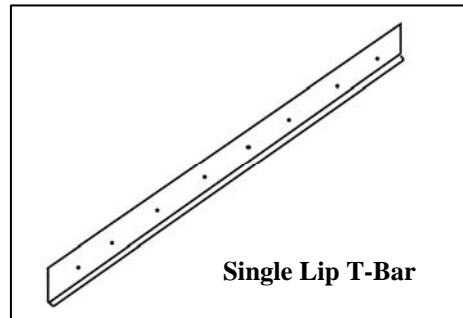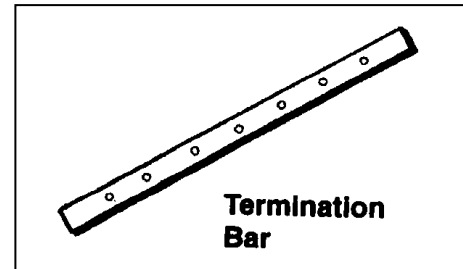

Approvals:

Comments: