
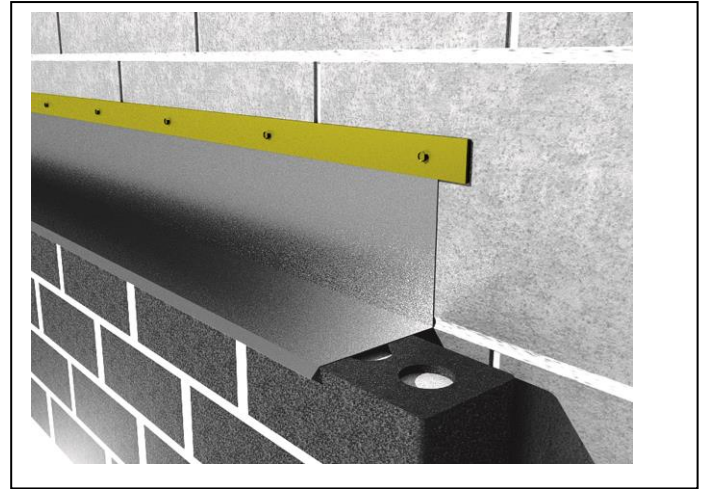


Termination bars are used to secure flashing to a backup wall. Start fastening at one end of the bar and proceed to the next hole to avoid bowing. Apply a sealant to the top edge of the bar and feather.

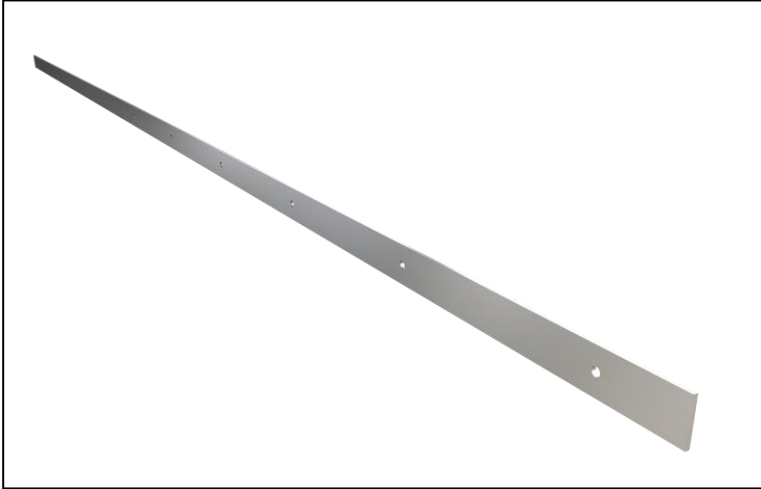

**STANDARD      SPECIAL**

**Standards:** (5/16" diameter holes 8" o.c.)      Finish: Stainless type 304

Select	Catalog No.	Thickness	Width (in.)	Length (ft)
<input type="checkbox"/>	TB818	1/8	1	8'
<input type="checkbox"/>	TB810	1/8	1	10'
<input type="checkbox"/>	TB81258	1/8	1 ¼	8'
<input type="checkbox"/>	TB812510	1/8	1 ¼	10'
<input type="checkbox"/>	TB61258	16 ga	1 ¼	8'
<input type="checkbox"/>	TB612510	16 ga	1 ¼	10'

Special

**Specials:**

Thickness:  1/8"  12 gage  14 gage  16 gage      Length: \_\_\_\_\_      Width: \_\_\_\_\_

Hole diameter: \_\_\_\_\_      On Center Hole Spacing: \_\_\_\_\_      Holes start \_\_\_\_\_ inches from end.

Quantity (pcs) \_\_\_\_\_

**Material Specifications**

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.  
(AISI Type 316 available upon request)