

Welded to steel columns and beams in the shop or field or attach to an existing wall using the two 5/16" diameter holes at the top and bottom. Various Channel Slot Anchors are then inserted into the slot for vertical adjustment.

See #132, #131, and #133 for Additional Slot Types.


See #129, #122, #123, #124, #125, and #134 for Channel Slot Brick Veneer Anchors

See #127, #135, #136, #137, #138, and #139 for Channel Slot Stone Anchors

Pullout Loads: for 16 gage T-Type Channel Slot Anchors pulled from channel slots

11 Gage Slot - 950 lbs failure

16 Gage Slot - 668.8 lbs failure

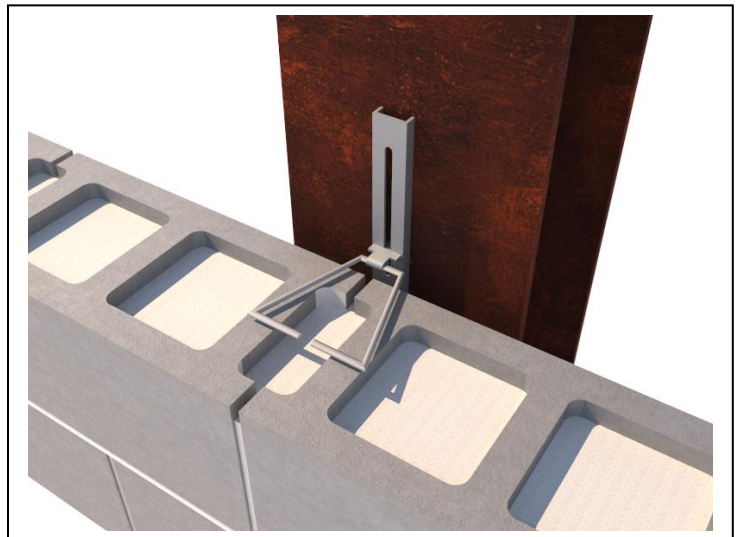

Standards:

Thickness: 11 gage 16 gage

1-3/8" wide x 8" long. Slot is 9/16" x 5-1/2"

Bends are 1/2" i.d. Holes are 5/16" diameter

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Plain Steel

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties:
ASTM A 167, ASTM A 666, ASTM A
240/A240M AISI Type 304.

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2:
(1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and
ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M
Structural Steel ASTM A36/A36M-08