


**Submittal Sheet**  
**#136 Channel Slot Split-Bend Stone Anchor**

Used to attach stones to backup with Channel Slots. (See #130, #131, #132, or #133 Channel Slots)

Also available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor

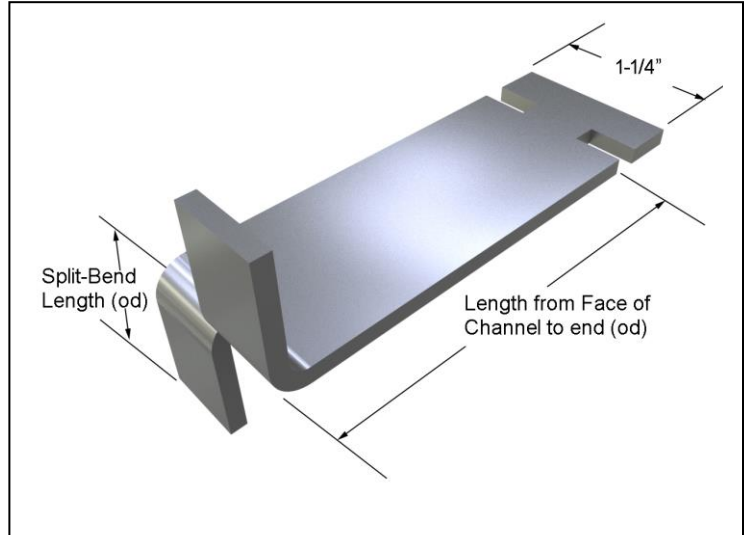

**Made to Order:**

Thickness:  3/16"  1/8"  12 gage  
 14 gage  16 gage

Width: 1-1/4"

Length from face of channel (od): \_\_\_\_\_

Split-Bend Length (od): \_\_\_\_\_

Finish:  Stainless type 304  
 Hot Dip Galvanized  
 Mill Galvanized  
 Zinc Alloy 710

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>).(0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

**Firewall Anchors:** Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)