


Submittal Sheet
#138 Channel Slot Flat Anchor

Used for anchoring stone to backup with Channel Slots. (See #130, #131, #132, or #133 Channel Slots). Flat part is usually field bent or drilled. Also used as a masonry wall stabilizing anchor for resisting lateral loads at the top of masonry walls with steel beams overhead. Use with #130 channel slots and #422 Plastic Rectangle Tube.

Also Available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor

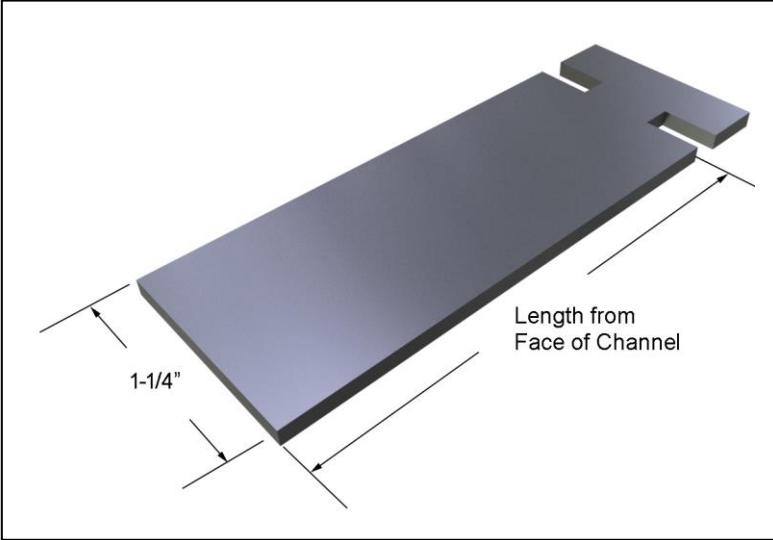

Made to Order:
 Thickness: 3/16" 1/8" 12 gage
 14 gage 16 gage

Length from face of
 Channel (minimum 1-1/2"): _____

Width: 1-1/4"

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
 (AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Firewall Anchors: Rolled Strip Zinc Alloy 710.
 (Firewall alloy 1/8" and 16 gage only)