


Used to level and plumb stone. Shims are molded from an engineered copolymer plastic material which combines high compression strength and superior load bearing surface contact characteristics.

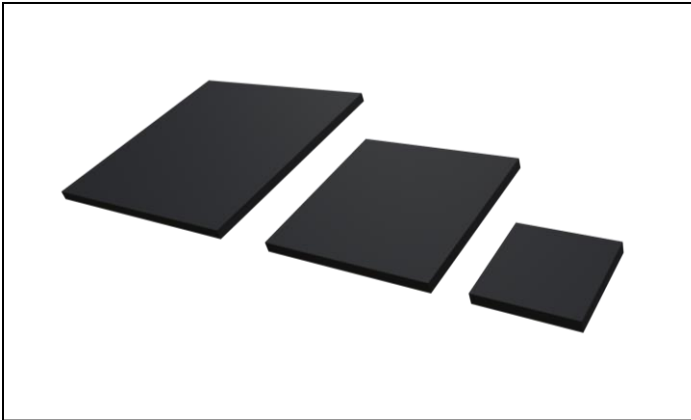

Standards:

	Catalog No.	Size (in.)	Thickness (in.)
<input type="checkbox"/>	185P116	1" x 1"	1/16
<input type="checkbox"/>	185P13	1" x 1"	3/8
<input type="checkbox"/>	185P14	1" x 1"	1/4
<input type="checkbox"/>	185P18	1" x 1"	1/8
<input type="checkbox"/>	185P216	2" x 2"	1/16
<input type="checkbox"/>	185P23	2" x 2"	3/8
<input type="checkbox"/>	185P24	2" x 2"	1/4
<input type="checkbox"/>	185P28	2" x 2"	1/8
<input type="checkbox"/>	185P316	3" x 3"	1/16
<input type="checkbox"/>	185P33	3" x 3"	3/8
<input type="checkbox"/>	185P34	3" x 3"	1/4
<input type="checkbox"/>	185P38	3" x 3"	1/8

Quantity: _____