


**Submittal Sheet**  
**#197 Corrugated-Type Column Anchor**

Used to tie masonry to a horizontal structural steel beam with the column flanges perpendicular to the wall.

Size: 1/8" thick x 1-1/4" wide. Specify overall length of anchor. Available in Mill Galvanized, Hotdip Galvanized After Fabrication, Stainless Steel and Zinc Alloy 710.

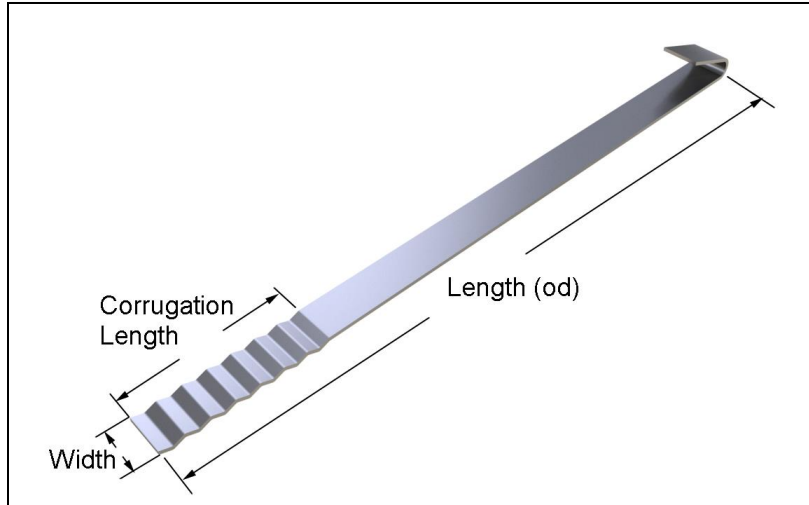

**Specials:**

Thickness: 1/8"

Width : 1-1/4"

Overall Length (od): \_\_\_\_\_

Corrugation Length: \_\_\_\_\_

Finish:  Stainless type 304  Hot Dip Galvanized  
 Mill Galvanized  Zinc Alloy 710

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

**Firewall Anchors:** Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)