

**Submittal Sheet**

**#278 Welded Plate-Strap Stone Anchor**

**MADE TO ORDER**


**Thickness:** 3/8", 1/4", 3/16", 1/8", 11 gage, 12 gage, & 16 gage.

**Strap Width:** 1-1/4" minimum recommended.

**Length:** Specify length as the outside dimensions between the bend and plate.

**Bend with Hole:** 1" minimum recommended. You should consider the overall length of the anchor and the height of the bend to make sure there is enough room for the installer to get the screw and tool in place without interference from the welded plate. Hole should be minimum of 1/16" larger than your screw size. (3/8" screw will use a 7/16" diameter hole).

**Plate:** Specify plate size (width and length). Unless noted, plate will be welded in center of height dimension.

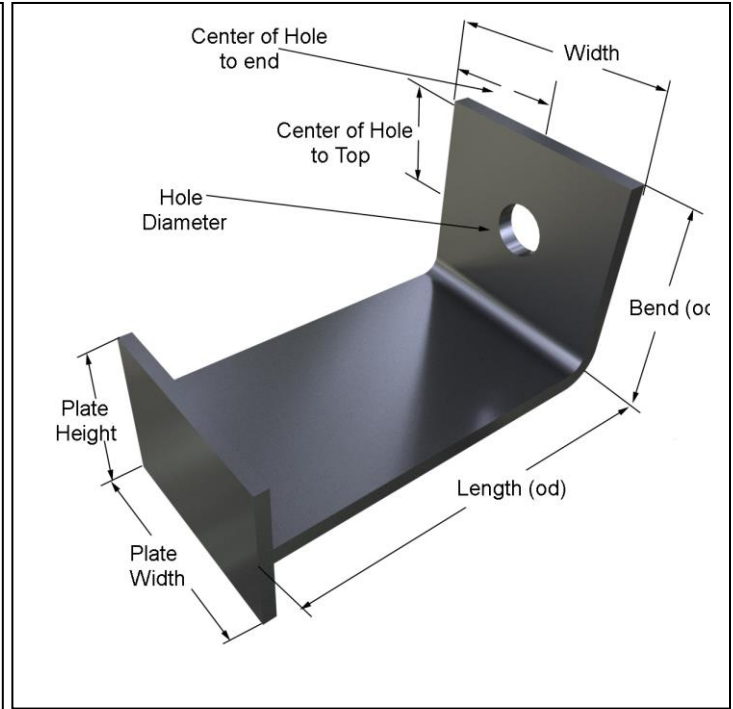

**Specials:**

Thickness:  3/8"     1/4"     3/16"     1/8"  
 12 gage     14 gage     16 gage

Length (od): \_\_\_\_\_ Width: \_\_\_\_\_

Bend with Hole (od): \_\_\_\_\_

Hole Diameter: \_\_\_\_\_

Center of Hole to Top: \_\_\_\_\_

Center of Hole to End: \_\_\_\_\_

Welded Plate: Width: \_\_\_\_\_ Height: \_\_\_\_\_

Finish:  Stainless type 304     Hot Dip Galvanized

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>.) (0.46kg/m<sup>2</sup>)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08