HECKMANN™ Building Products
Div. of Mechanical Plastics Corp.
www.heckmannanchors.com

Submittal Sheet
#340-B Corrugated L-Anchor with Slot

Custom:

Used for attaching masonry to various backups.
Specify length, width, bend length, steel type and slot configuration.

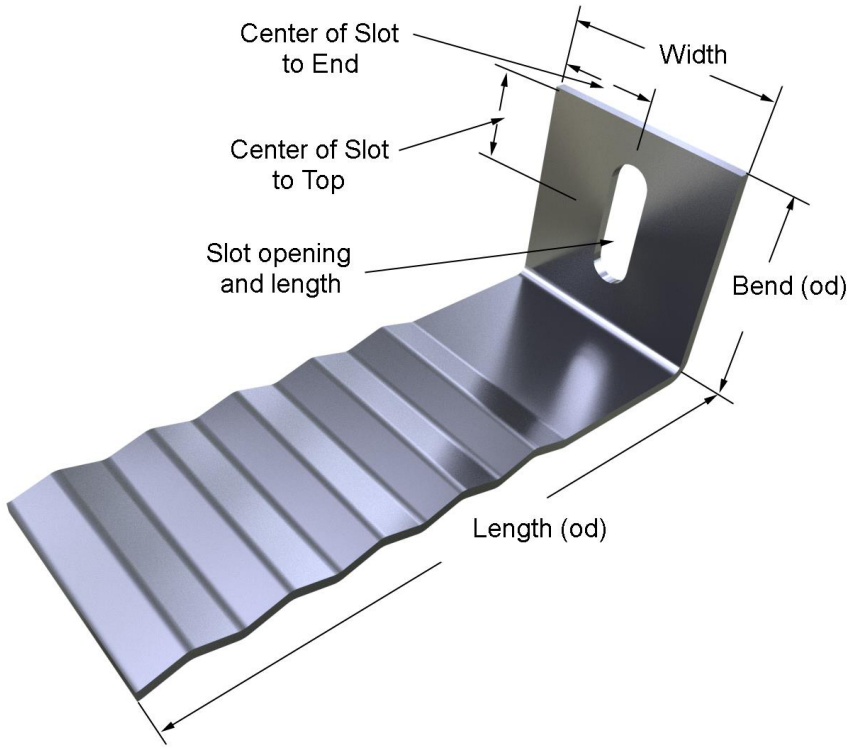

Made to Order:

Thickness: ◯ 1/4" ◯ 3/16"" ◯ 1/8"
◯ 12 gage ◯ 14 gage ◯ 16 gage

Length od: _____ Width: _____

Bend (od): _____

Slot Opening and Length: _____

Center of Slot to Top: _____

Center of Slot to End: _____

Finish: ◯ Stainless type 304 ◯ Hot Dip Galvanized
◯ Mill Galvanized ◯ Zinc Alloy 710

Quantity: _____ **Print** **Reset Form**

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
Wire ties and anchors: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)
Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft^2.)(0.46kg/m^2)
Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
Wire: ASTM A 641 (0.1 oz/ ft^2.)
Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi
Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)

110 Richards Avenue
Norwalk, CT 06854-1685 USA
Phone: 800-621-4140
info@heckmannanchors.com
www.heckmannanchors.com