


Submittal Sheet #340-B Corrugated L-Anchor with Slot

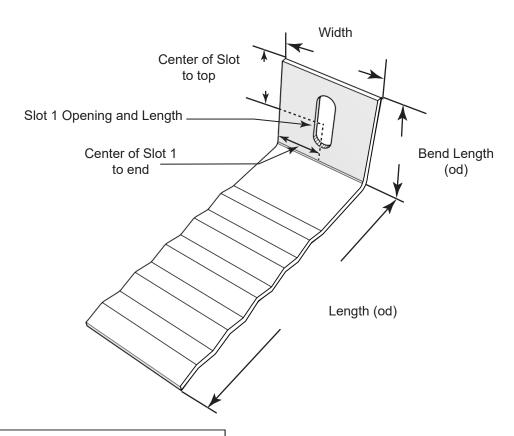

QUANTITY:

THICKNESS:

3/16" 1/8"

14 ga 16 ga

Stainless Plate Min. Fy. = 45,000 psi (ASTM A666)

MATERIAL TYPE:

Type 304 Stainless Steel

Type 316 Stainless Steel

Zinc Alloy 710 (1/8" Only)

Plain Carbon Steel*

*Plain Carbon Steel for end user plating - $\underline{\text{not recommended for direct installation}}$



CLICK OR SCAN FOR MATERIAL SPECIFICATIONS

PROJECT DETAILS:

LOCATION:

PROJECT NAME:

NOTES:

Heckmann is not responsible for your choice of anchors and dimensions for your project. The choice of anchors and products should be decided by the architects or engineers knowledgeable with the project. Once a custom order has been placed it cannot be cancelled or returned. Any changes to the original order may require additional charges. Your signature is required for us to proceed. By signing this order, you agree that you have reviewed the details and specifications of the custom order and that said details and specifications are per your request. Further, by signing this order you are waiving **any claim** against or right of non-payment for products produced to the specifications of the order.

CONTACT INFO

NAME:

COMPANY:

PHONE: ___

E-MAIL: _____

DATE:

Phone: (800) 621-4140

ACCEPTED BY:

REVISED: 01/2024