


**Submittal Sheet
#340 Series Masonry Anchors**

Custom Made:

Various combinations of bends holes and slots make up our #340 series of custom masonry anchors for various anchoring requirements from brick veneers to firewall anchors..

Steel thickness ranges from 1/4" to 16 gage.

Specify length, width, bend length, steel type, and size and location of holes and slots.

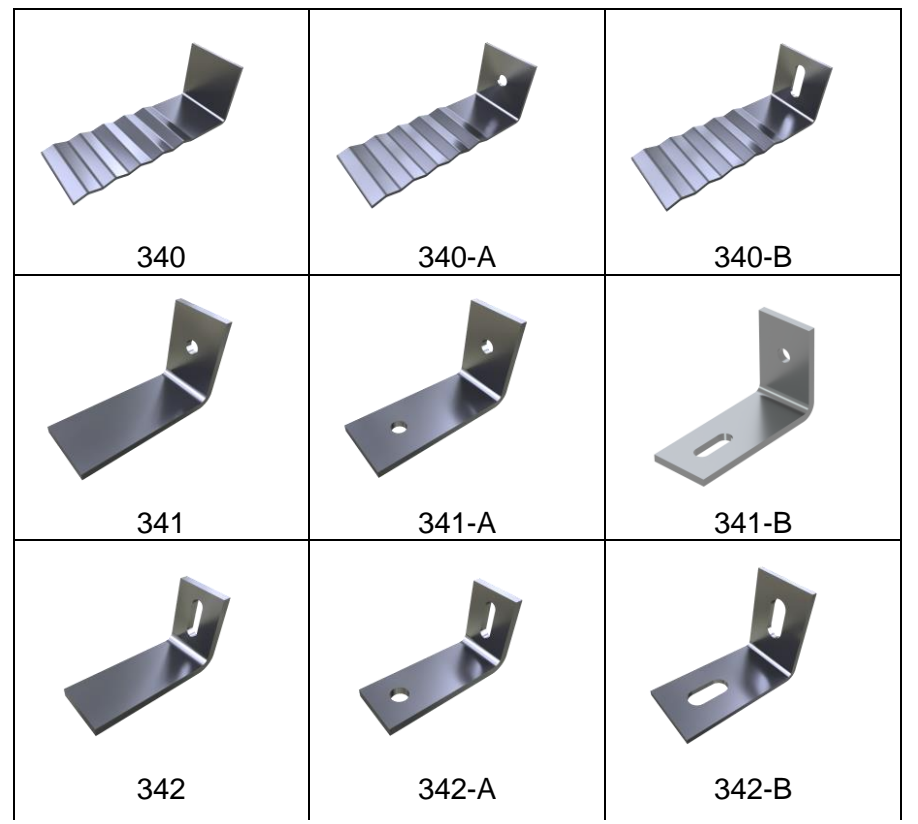

All Custom Made

See individual Submittal Sheets

- 340 Corrugated L-Anchor
- 340-A Corrugated L-Anchor with Hole
- 340-B Corrugated L-Anchor with Slot
- 341 L-Anchor With Hole
- 341-A L-Anchor with Two Holes
- 341-B – L-Anchor with Hole and Slot
- 342 L-Anchor with Slot
- 342-A L-Anchor with Hole and Slot
- 342-B L-Anchor with Two Slots

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft².) (0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)