


Used in vertical or horizontal applications to provide expansion in joints and prevent unwanted clogging with mortar.

Exceeds ASTM D-1056 specifications for closed cell sponge neoprene expansion joints in residential, commercial and industrial applications.

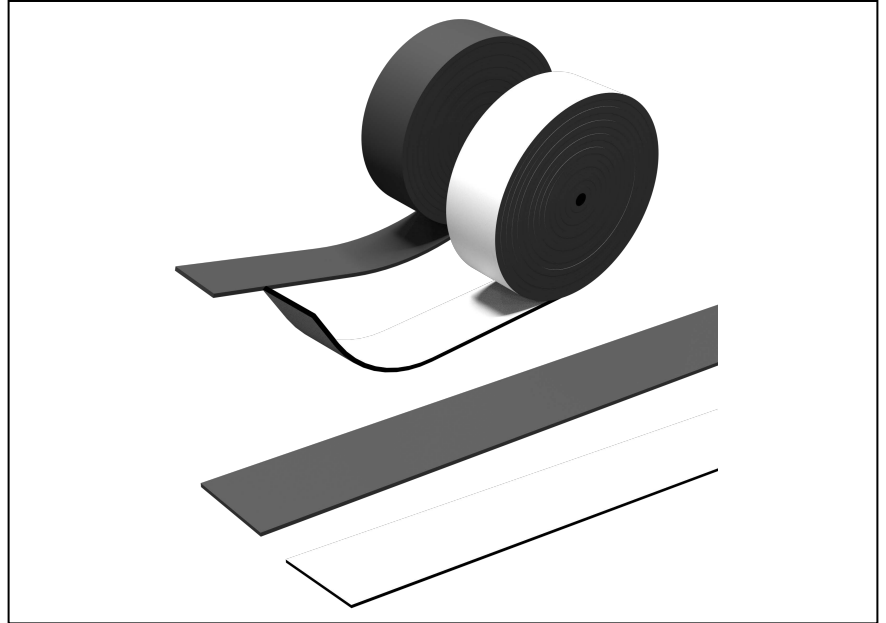

Sold in 50 foot rolls

Width: 3" other: \_\_\_\_\_

Thickness: 1/4" 3/8" 1/2" other: \_\_\_\_\_

With Adhesive back

Without Adhesive back

Quantity (in rolls): \_\_\_\_\_

### Material Specifications

**Neoprene Rubber** conforming to ASTM-D-1056 Type II Class A - C121A, 2A1, SCE 41, RE41.