


**Submittal Sheet**  
**#370 Seismic Hook Tab**

20 gage clip 7/8" wide x 9/16" long with a 1/4" o.d. bend available welded to Hotdip or Stainless Steel Wire Veneer Ties. Please note that the Code Requirement for tying veneer anchors using a reinforcing wire in the veneer attached to anchors has been eliminated in the TMS 402 2013 edition and IBC 2015 edition.

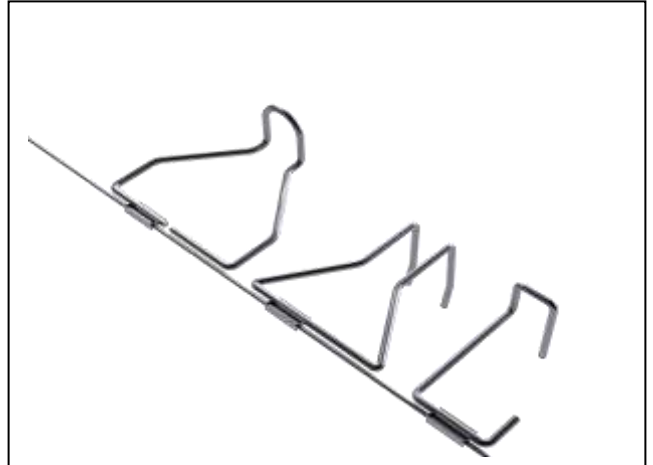

The #370 Seismic Hook Tab is factory welded to any of our 3/16" diameter wire veneer anchors. A 9 gage or 3/16" single reinforcing wire runs through the veneer every 18" high and is tied back to the backup wall using the clip that is welded to the anchor.

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.  
 (AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2:  
 (1.50 oz/ ft<sup>2</sup>.) (0.46kg/m<sup>2</sup>)

**Plain Carbon Steel:** ASTM A1008/A1008M  
 Structural Steel ASTM A36/A36M-08

