



110 Richards Avenue - Norwalk, CT 06854 Tel: 708-865-2403 • Fax: 708-865-2640

Submittal Sheet #410 Glass Block Panel Anchors

Panel Anchors are used to tie the glass block to the jambs and head. They are installed at both jams under the expansion strip in every other course. They are not installed at the sill. The 16" panel anchors are field-bent 90 degrees 3"-4" from the end and installed using 2 screws. Also use panel anchors at the header going down the vertical joint every other course.

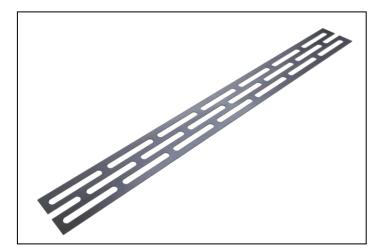



One Size:

Thickness: 22 gage

Length: 16" Width: 1 ³/₄"

Finish: Stainless type 304

Quantity:

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304. (AISI Type 316 available upon request)

Phone: 800-621-4140 Rev 07/21

info@heckmannanchors.com www.heckmannanchors.com