


**Submittal Sheet**  
**#586 Twisted Joist Pin Anchor**

Used to anchor wood joists to a masonry wall. Pin section is grouted into the CMU wall and the strap is nailed to the floor joists. Fixed Pin is 3/8" diameter x 5" long centered 1" from end of anchor.

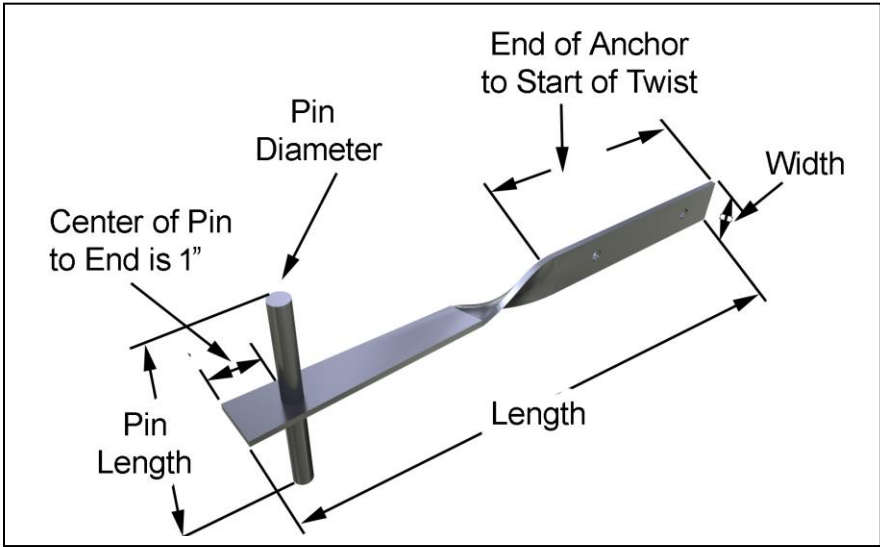

**Custom:**

Thickness: 1/8" Width: 1" Mill Galvanized

Center of Pin to End: 1"

Pin is 3/8" diameter x 5" and is fixed in place.

7/32" nailing holes (centered 3/4" from end and 3" o.c.)

Number of Holes: \_\_\_\_\_

Length: \_\_\_\_\_

End of Anchor to Start of Twist: \_\_\_\_\_

Finish: Mill Galvanized

Quantity: \_\_\_\_\_

**Material Specifications**

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60  
 Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)