


## Submittal Sheet #135 Channel Slot Stone Anchor

www.heckmannanchors.com

Used to attach stone to backup wall with attached Channel Slots. (See #130, #131, #132, or #133 Channel Slots)

Also Available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor.

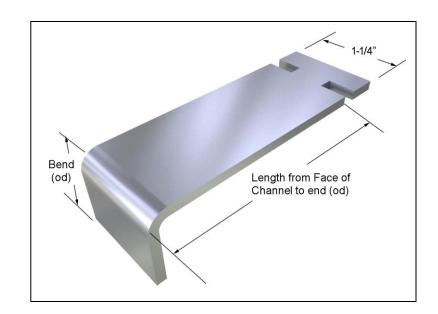

## Made to Order:

Thickness: 3/16" 1/8" 12 gage

14 gage 16 gage

Width: 1-1/4"

Length from face of channel (od):

Bend Length (od):

Finish: Stainless type 304

Hot Dip Galvanized Mill Galvanized Zinc Alloy 710

Quantity:

## **Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/

 $ft^2$ .)(0.46kg/m<sup>2</sup>)

Mill Galvanized: Sheet metal anchors and ties:

**ASTM A 653 G60** 

Plain Carbon Steel: ASTM A1008/A1008M

Structural Steel ASTM A36/A36M-08

Firewall Anchors: Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)