



# Heckmann Building Products Inc.

1501 N. 31<sup>st</sup> Avenue  
Melrose Park, IL 60160-2911  
800-621-4140 or 708-865-2403 Fax: 708-865-2640  
[www.heckmannbuildingprods.com](http://www.heckmannbuildingprods.com)

## SUBMITTAL SHEET: #130 WELD-ON CHANNEL SLOTS

Welded to steel columns and beams in the shop or field. Various Channel Slot Anchors are then inserted into the slot for vertical adjustment.

Standard Size: 11 gage and 16 gage x 1-3/8" wide x 8" long. Slot is 9/16" x 5-1/2"

Bends are 1/2" i.d.

Available in Plain Steel, Mill Galvanized, Electro Galvanized After Fabrication, Hotdip Galvanized after Fabrication, and Stainless Steel

See #132, #131, and #133 for Additional Slot Types.  
See #129, #122, #123, #124, #125, and #134 for Channel Slot Brick Veneer Anchors  
See #127, #135, #136, #137, #138, and #139 for Channel Slot Stone Anchors

Pullout Loads: for 16 gage T-Type Channel Slot Anchors  
11 Gage Slot - 950 lbs failure  
16 Gage Slot - 668.8 lbs failure

### **Stainless Steel:**

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

### **Hotdip Galvanized:**

ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>).(0.46kg/m<sup>2</sup>)

### **Mill Galvanized:**

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

### **Plain Steel:**

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

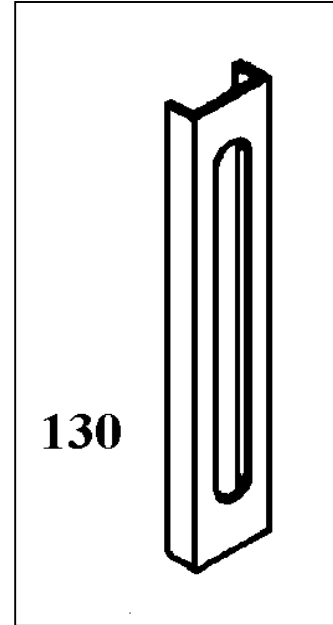

Approvals:

Comments: