



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: No. 443 HORSESHOE SHIMS

Standard Sizes 2" x 2" and 2" x 3" in thicknesses 1/16", 1/8" and 1/4" available in Plain or Galvanized (Mill Galv for 1/16" and 1/8", Electro for 1/4", or Hotdip Galvanized After Fabrication for all three)
Standard Slot is 13/16" x 1-1/2".

Custom thicknesses, sizes, and slots are available upon request. Specify thickness, length, width, type of steel, slot size and location of slot.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

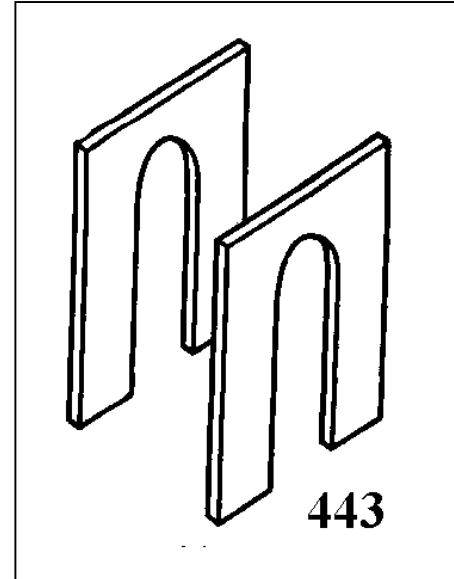

Approvals:

Comments: